


Clamshell buckets are made on the basis of our successful and proven to be durable design of standard grapple.
 Available in 3 most popular sizes, with optimal geometry and perfect construction.
 Clamshell buckets can be used on all machinery using the bracket.

G60L / 100 L

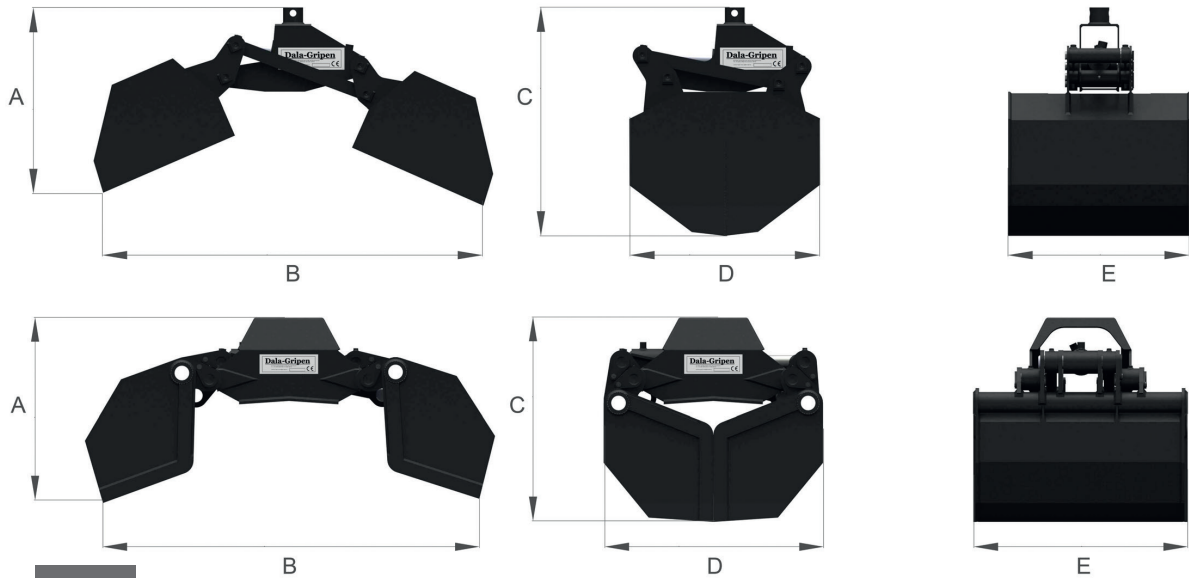

G200 L

MODEL		G60L	G100L	G200L
A	HEIGHT WHEN OPEN	mm 480	485	625
B	MAX OPENING	mm 1210	1335	1535
C	HEIGHT WHEN CLOSED	mm 650	715	760
D	LENGTH WHEN CLOSED	mm 500	580	820
E	MAX WIDTH	mm 406	550	790
CAPACITY		l 60	100	200
GRAPPLE WEIGHT		kg 59	78	270
MAX LOAD		kg 500	600	2500
MAX WORKING PRESSURE		Bar 160	160	250
CYLINDER FORCE		kN 50	50	126
GRIPPING FORCE ARMS TIP		kN 8	8	18
OPENING TIME 70L/MIN		s 0,3	0,3	0,7
CLOSING TIME 70L/MIN		s 0,5	0,5	1,1
ROTATOR CONNECTION *		F/G	F/G	C
ORDER CODE		G60L	G100L	G200L

* Please, see the rotator connection page for detailed information.



G60 L / 100 L



G200 L