INDUSTRIAL ROTATOR **CPR9-01**

(PATENT PENDING)

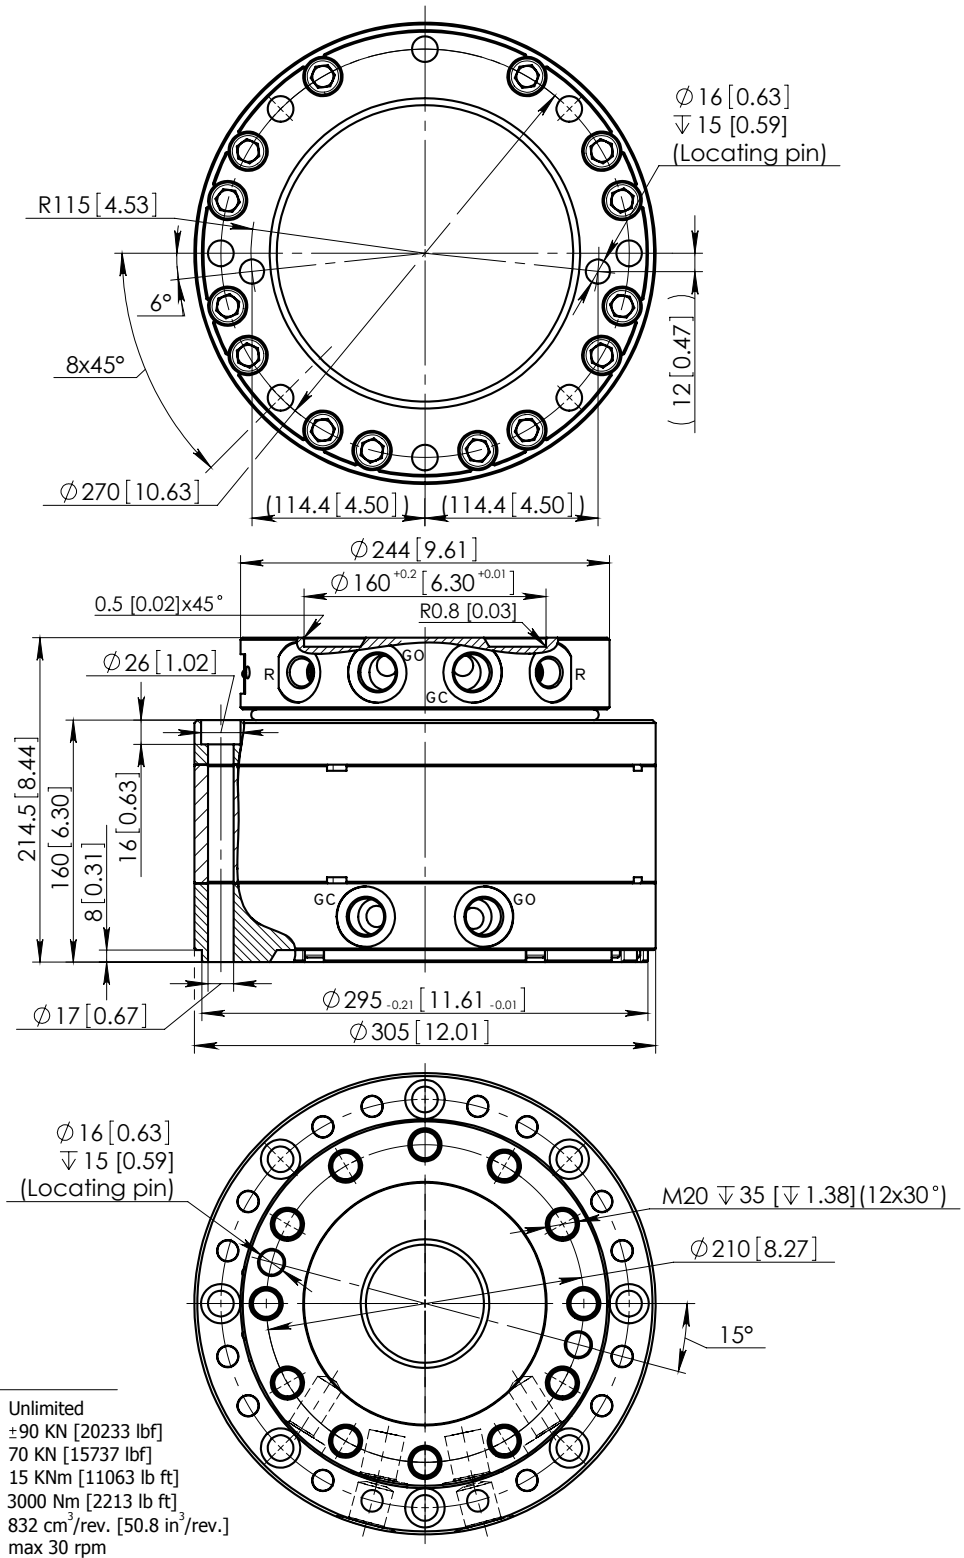

Technical data

Rotation	Unlimited
Max axial load	±90 KN [20233 lbf]
Max radial load	70 KN [15737 lbf]
Moment of deflection	15 KNm [11063 lb ft]
Torque at 25 Mpa	3000 Nm [2213 lb ft]
Rated displacement	832 cm^3/rev. [50.8 in^3/rev.]
Rotation speed	max 30 rpm
Oil duct area for grapple	150 mm^2 [0.232 in^2]
Weight	95 kg [209 lb]

Function	Max working pressure	Rec oilflow	Connection
R - rotation	25 MPa [3625 psi] *	30 l/min [7.9 gal(US)/min]	G 1/2"
GO - grapple/tool open	35 MPa [5076 psi]		G 3/4"
GC - grapple/tool close	35 MPa [5076 psi]		G 3/4"

* Relief valves fitted

2008.11.20.

BALTROTORS

Instituta Street - 1, Salaspils. Riga region, LATVIA LV-2169
Phone: +(371) 67 981074, Fax: +(371) 67 981075
E-mail: baltrotors@baltrotors.lv